

ASK Ultra p2p


4K Wireless HDMI Extender



Key Features


- 4K60 wireless HDMI transmitter and receiver set
- Support 4K@60 high resolution
- 16ms ultra-low latency
- Built-in fast 802.11ac 2T2R WiFi MIMO module with rate up to 866Mbps
- Auto WiFi channel selection
- High picture quality with vision lossless YUV 4:4:4 wireless transmission
- Support HDR 10bit
- Support audio 7.1 channels
- Support Dolby Atmos/DTS bypass
- AES128 encryption and proprietary coding protocol and transmission algorithms to ensure high data security

Application

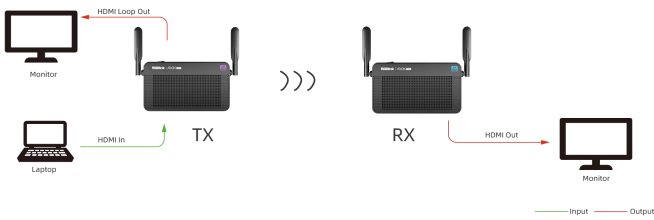


Dimension

TX

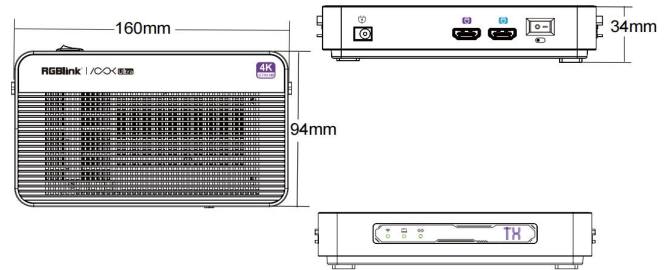

RX

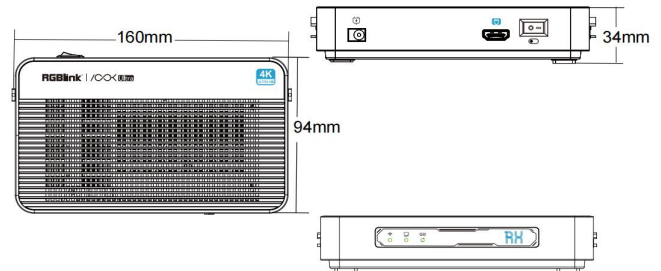

Order Code

Product Code	Item
450-4002-01-0	ASK Ultra p2p (TX+RX)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Interface	Input	TX	HDMI 2.0	1×HDMI-A
	Output	TX	HDMI 2.0	1×HDMI-A (LOOP)
		RX	HDMI 2.0	1×HDMI-A
	Power	TX	Power	1×DC Power Jack
RX		Power	1×DC Power Jack	
Performance	Input Resolution	HDMI 2.0	4096x2160p@30/60 3840x2160p@30/60 2160x1200p@90 2880x1600p@90 1920x1080p@24/30/60/120 1920x1080i@50/60 1280x720p@30/60 640x480p@60	
	Output Resolution	HDMI 2.0	4096x2160p@30/60 3840x2160p@30/60 2160x1200p@90 2880x1600p@90 1920x1080p@24/30/60/120 1920x1080i@50/60 1280x720p@30/60 640x480p@60	
	Latency	About 16ms		
	HDR	HDR 10 bit		
	Dolby Atmos/DTS Bypass	YES		
	Distance	300m	(open environment)	
	Supported Standards	HDMI	2.0	
	HDCP	2.2		
Power	Input Voltage	DC 12V/1.5A (TX/RX)		
	Consumption	10W (TX/RX)		
Dimension	Operation Temperature	0°C to ~ +40°C (+32°F ~ + 104°F)		
	Storage Temperature	- 10°C ~ +60°C (+14°F ~ + 140°F)		
	Operation Humidity	10% to 80% RH		
Physical	Net Dimension	160mm × 94mm × 34mm(TX/RX)		
	Net Weight	330g (TX/RX)		

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
www.rgbink.com

